


REV	CHANGE	DATE	DRN	CHK
A	Drawn	07/17/08	WM	JL

§ Indicates change from previous revision

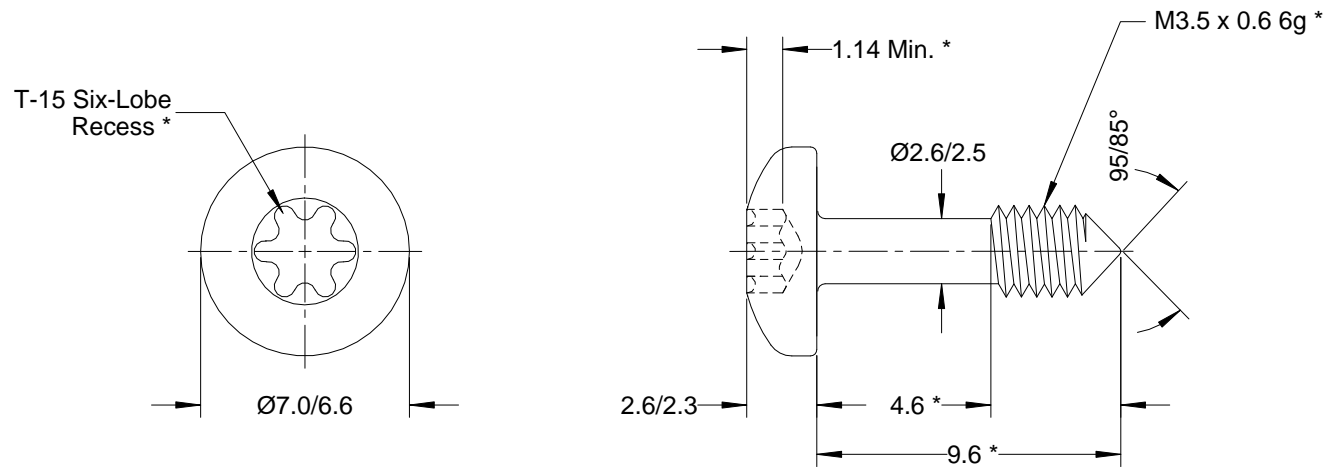

NOTES:

- * Denotes critical item for lot inspection.
- No burrs or loose chips. *
- Material: 1010 Carbon steel, case harden. *
- Finish: Zinc 3.8 μm min., bake 4 hours min. at 190°C to 220°C within three hours after applying zinc per ASTM B 633, and apply clear chromate. *
- Material and finish must comply with European Union Restriction of Hazardous Substances Directive 2002/95/EC (RoHS). *

COMPONENT	Screw		
CS1980 M3.5X9.6MM TX-PN-CS-STL-Z SALES DRAWING	REV		
	A		
	SHEET		
	1 of 1		

PENCOM

1300 Industrial Rd., Unit 21 * San Carlos, CA 94070
(650) 593-3288 * (650) 593-3299 FAX
www.pencomsf.com

This Drawing is the Property of PENCOM.
It contains confidential, proprietary
information that is PENCOM property. Do
not disclose to or duplicate for others except
as authorized by PENCOM.

Tolerances (Metric)
.x = ± 0.2
.xx = ± 0.1
x° = $\pm 1^\circ$
or As Noted

SCALE

N.T.S.